

SLURRY PUMP

Gentle

- Low speed operation
- Large free ball passage
- No fines generation

Tough

- Long cycle life
- Withstand abrasion and corrosion due to special cladding
- Designed to tolerate cavitation

Reliable

- Power reserves
- Frequency controlled e-motor
- Operation in different environmental conditions

Flexible

- Supplying dewatering bins located hundreds of meters apart from the coke drums
- Economical advantages with small space in the plant
- For greenfield and revamp projects
- Specifically designed for ECHO system

Find out more:

 art-envi.com



ENVIRONMENTAL
COKE HANDLING
OPERATION

The Slurry Pump is designed especially for processing petrol coke slurry in the ECHO system.

It is a robust single-stage centrifugal pump with a closed impeller and direct drive with frequency controlled e-motor for economical power consumption.



Technical Features:

Pump size: Up to DN 400

Flow rate: Up to 4,000 m³/h

Diff. head: Up to 90 m

Solid size: Up to 200 mm

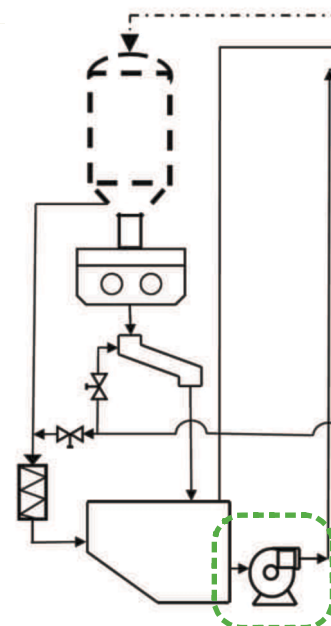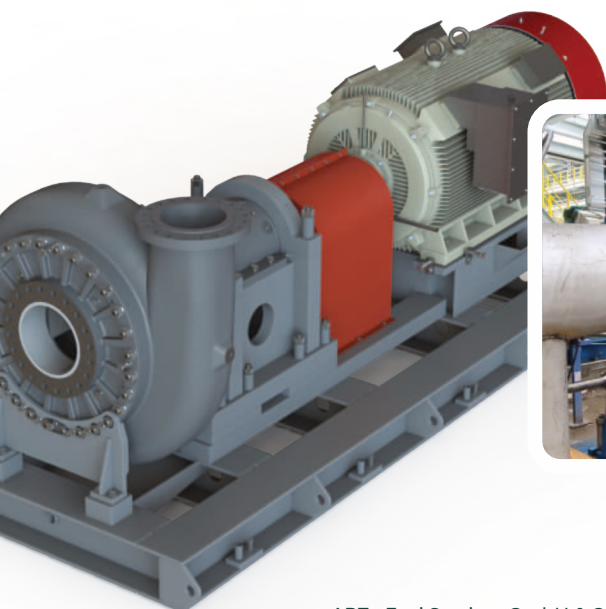

Efficient. Reliable.

ART | GROUP

